

Villas West Architectural Specification

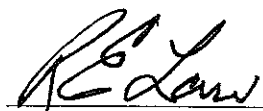
Specifications for Patio Irrigation System Installation

Specification No:....VWAS 17
Issue Date:.....12/20/05
Revision Date:.....New
Revision Level:.....New
Board Approval Date:12/20/05
Page:.....1 of 1

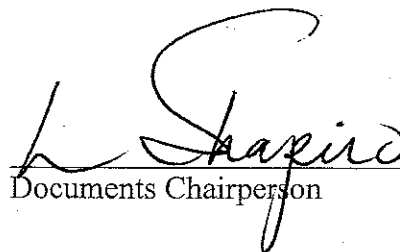
General:

An irrigation system installed on a patio shall comply with the requirements stated below.


1. A galvanized tee shall be threaded to the water supply pipe that is stubbed out from the patio wall.
2. A hose bib shall be threaded to one side of the galvanized tee.
3. A shut off valve for the irrigation system shall be threaded into the other opening of the galvanized tee.
4. Threads shall be sealed with appropriate thread sealant and threaded fittings must be made up wrench tight. Either Teflon tape or paste type thread sealant may be used.
5. All irrigation components are to be installed to the downstream side of the shut off valve.
6. No irrigation emitters shall be installed to supply water to potted plants on the walls of the patio.
7. All emitters shall be positioned so that they do not drip on any portion of the patio wall or the villa wall.


Architectural Chairperson

12/21/05
Date


Documents Chairperson

Date


CCM Administrator

12/21/05
Date


Association President

12/21/05
Date